TECHNICAL DATA

Slides per basket: Up to twenty

Containers for reagents: Four

Rinse water bath: One with overflow. Optional bottom drain can be

installed.

Drying container: 12°C-15°C higher that the room temperature.

Programming: Time to dip the basket in each container.

> During this time, resting periods and shaking periods.

> Time to maintain the basket on top of each

container after dipping.

Number of programs: The memory can store up to ten programs

Positions per program: The basket can go to ten different positions. At

each of them the total dipping time, resting and shaking, and drain over the container can be

selected.

Mains: 100/240 V, 50/60 Hz, 250 W

Dimensions (LxWxH): 700x 440X400 mm

Weight: 23 Kg

ORDERING INFORMATION

Cat.No.

Basic unit includes one slide basket and four plastic containers with lid.

Specify mains required (the Cat. No. may change) Quick drain system. Optional 5300 5310 Stainless steel container tray (one comes with the basic unit) 5438 Basket for slides (one comes with the basic unit) 5417



Contact us in internet.

To see how the instruments works in a multimedia demonstration, to buy instruments, accessories or consumables on-line visit our web page:



The IUL instrument owners who are registered in our web will have access to extra services like example of microbiology applications with our instruments, software updates, direct technical service and more.



Information

POLY **STAINER**

POLY STAINER TUL



www.iul-inst.com

Features and operation


Protected electronic

All the electronic circuit and electrical components are built in an elevated bridge. No splashing can damage them.





The stainless
steel container
tray, can be
easily
removed and
replaced
without any
tool.

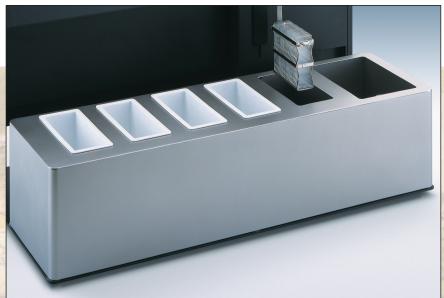

Quick drain system

As optional accessory the quick drain system allows to empty out the water container from the bottom. In the normal situation the water overflows.



