


SICCO Auto-Maxi 2-Desiccator

Panels: clear	Material: PMMA	Temperature resistance: -20 °C to +70 °C	Use: normal pressure	Stand: casters
------------------	-------------------	---	-------------------------	-------------------

Specification:

two chambers, two doors, usable with up to 17 shelves per chamber, including two shelves made of stainless steel per chamber, two trays and two hygrometers

Cat. No.:	V 1916-01
Overall dimensions* W x H x D mm	560 x 1150 x 580
Excess length of drying unit mm	100 back side
Usable interior space W x H x D mm	495 x 500 x 540 per chamber
Usable volume liters	140 per chamber
Total volume liters	150 per chamber
Weight kg/approx.	35
Maximum all-over load per shelf kg	30
Maximum all-over load kg	80 per chamber
Total all-over load kg	160

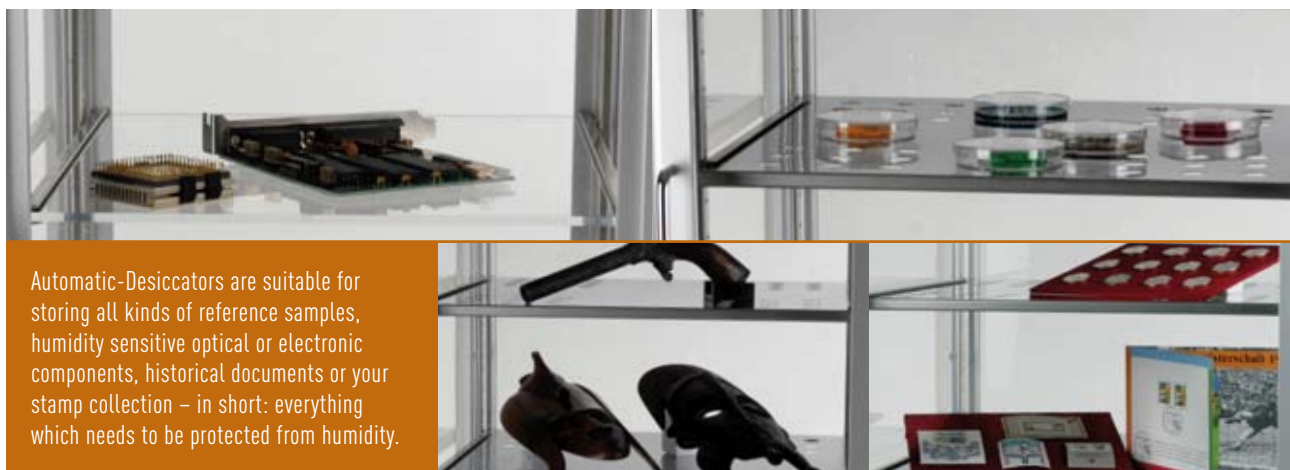

Automatic-Desiccators are suitable for storing all kinds of reference samples, humidity sensitive optical or electronic components, historical documents or your stamp collection – in short: everything which needs to be protected from humidity.

Drying properties

Please read our information on pages 20–21.

