


Super Flangeless™ Fittings

- ▶ 1/4-28 and M6 flat-bottom fittings for 1.8 mm or 1/8" OD tubing
- ▶ M6 flat-bottom fitting for 2.0 mm OD tubing
- ▶ Pressure rated up to 2,500 psi (172 bar)

These fittings offer all of the benefits of Super Flangeless Fittings for 1.8 mm, 1/8" or 2.0 mm OD tubing. Due to the double compression by the lock ring and ferrule on the tubing, this fitting system boasts the highest pressure rating for 1/8" OD tubing into flat-bottom ports. These fittings can be used in any of the IDEX Health & Science products featured in the catalog with a 1/4-28 or M6 flat-bottom port for increased pressure holding ability. A variety of nut styles and materials are available, plus contact us for additional nut color options.

Please note the design of the Super Flangeless Fittings for 1/8" OD tubing prevents them from being used in shallow ports. For these applications, we recommend using the small valve Flangeless Ferrule on pages 24 – 26.

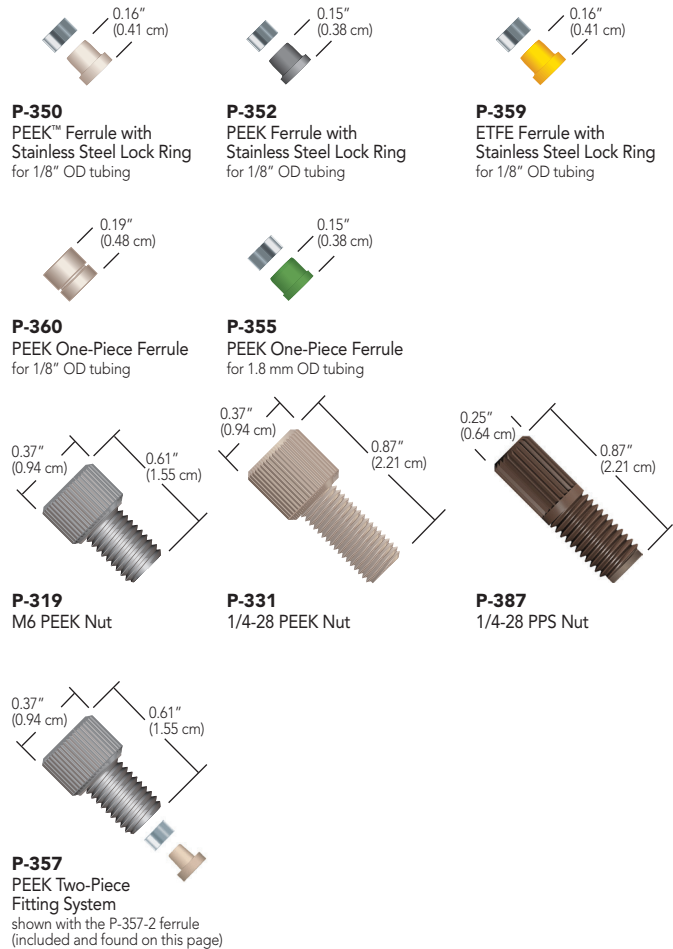

Related Products

- ▶ Tightening Tools for all the nut head styles featured on this page can be found on page 33.
- ▶ Super Flangeless fittings for 3/16" OD tubing can be found on page 30.



Top Seller SEE STARRED PRODUCTS

| Part No. | Description | Port | Pressure Rating | Head Style | Material | Qty. |
|----------------------------------|--|--------------------------|---------------------|----------------|-------------------------|-------|
| SUPER FLANGELESS NUTS | | | | | | |
| C-235x | Super Flangeless Nut for 1/8" OD Tubing | 1/4-28 Flat Bottom | * | 1/4" Hex | SST | 10-pk |
| F-156 | Super Flangeless Nut for 1/8" OD Tubing, Female | 1/4-28 Flat Bottom | * | Female Knurl | PEEK Black | ea. |
| F-364x | Super Flangeless Nut for 1/8" OD Tubing, FlushNut™ | 1/4-28 Flat Bottom | * | FlushNut | SST | 10-pk |
| LT-210x | Super Flangeless Nut for 1/8" OD Tubing | 1/4-28 Flat Bottom | * | Double Wings | PEEK Natural | 10-pk |
| LT-215x | Super Flangeless Nut for 1/8" OD Tubing, Short | 1/4-28 Flat Bottom | * | Standard Knurl | PEEK Natural | 10-pk |
| P-317 | Super Flangeless Nut for 1/8" OD Tubing | M6 Flat Bottom | * | Standard Knurl | PPS Black | ea. |
| P-319 | Super Flangeless Nut for 1/8" OD Tubing, Short | M6 Flat Bottom | * | Standard Knurl | PEEK Black | ea. |
| ★ P-331 | Super Flangeless Nut for 1/8" OD Tubing | 1/4-28 Flat Bottom | * | Standard Knurl | PEEK Natural | ea. |
| P-332x | Super Flangeless Nut for 1/8" OD Tubing | 1/4-28 Flat Bottom | * | Standard Knurl | Delrin® Black | 10-pk |
| ★ P-336 | Super Flangeless Nut for 1/8" OD Tubing, Short | 1/4-28 Flat Bottom | * | Headless Knurl | PEEK Natural | ea. |
| P-337x | Super Flangeless Nut for 1/8" OD Tubing, Short | 1/4-28 Flat Bottom | * | Headless Knurl | PEEK Black | 10-pk |
| P-357x | Super Flangeless Fitting for 2.0 mm OD Tubing | M6 Flat Bottom | * | Standard Knurl | PEEK Black, Natural/SST | 10-pk |
| ★ P-381 | Super Flangeless Nut for 1/8" OD Tubing | 1/4-28 Flat Bottom | * | Standard Knurl | PPS Natural | ea. |
| P-387 | Super Flangeless Nut for 1/8" OD Tubing | 1/4-28 Flat Bottom | * | Standard Knurl | PPS Natural | ea. |
| SUPER FLANGELESS FERRULES | | | | | | |
| ★ P-350x | Super Flangeless Ferrule for 1/8" OD Tubing | 1/4-28 Flat Bottom | 2,500 psi (172 bar) | — | PEEK Natural/SST | 10-pk |
| P-352x | Super Flangeless Ferrule for 1/8" OD Tubing | 1/4-28 or M6 Flat Bottom | 2,500 psi (172 bar) | — | PEEK Black/SST | 10-pk |
| P-355x | Super Flangeless Ferrule for 1.8 mm OD Tubing | 1/4-28 or M6 Flat Bottom | 2,500 psi (172 bar) | — | PCTFE Green/SST | 10-pk |
| P-357-2x | Super Flangeless Ferrule for 2.0 mm OD Tubing | M6 Flat Bottom | 5,000 psi (345 bar) | — | PEEK Natural/SST | 10-pk |
| ★ P-359x | Super Flangeless Ferrule for 1/8" OD Tubing | 1/4-28 Flat Bottom | 1,000 psi (69 bar) | — | ETFE Yellow/SST | 10-pk |
| P-360x | Super Flangeless Ferrule for 1/8" OD Tubing | 1/4-28 Flat Bottom | 1,500 psi (102 bar) | — | PEEK Natural | 10-pk |

*Pressure rating of nut depends on the ferrule used.