


Two-Piece RheFlex® Fingertight Fittings


The Rheodyne® RheFlex Precision Two-Piece PEEK Fittings sets provide inert, biocompatible connections for instrumentation. These fittings have a reliable, time-tested design. Each 1/16" fittings set contains a 10-32 threaded nut and a specially-designed PEEK ferrule. Three lengths of the 1/16" nut are available: Standard, Short, and Extra Long. RheFlex Fingertight Fittings are rated for use up to 7,000 psi (483 bar). Also offered in this product line is the 6000-078 fitting, designed to connect 1/8" OD tubing into our manual preparative-scale injection valves. (See pages 128–134 for more information on these valves.)

View the online product bulletin at: www.idex-hs.com.

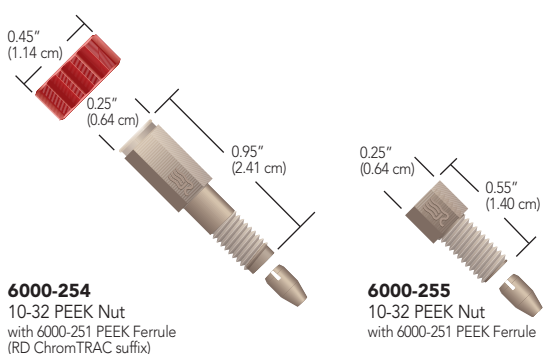

6000-254
10-32 PEEK Nut
with 6000-251 PEEK Ferrule
(RD ChromTRAC suffix)

6000-255
10-32 PEEK Nut
with 6000-251 PEEK Ferrule



6000-078
5/16-24 PEEK Nut
with 6000-079 PEEK Ferrule



ChromTRAC™

- ▶ Brightly colored knobs to easily track inlets and outlets of valves, columns, and detectors

All ChromTRAC-compatible RheFlex fittings offer the ChromTRAC knob option. Specify the ChromTRAC two letter suffix for the color choice when ordering. Please see the ChromTRAC Suffix Codes table below. For example, to order red ChromTRAC knobs with the RheFlex One-Piece Fitting on this page, specify 6000-282RD. No suffix indicates black knobs.

View the online product bulletin for RheFlex fittings at: www.idex-hs.com.

CHROMTRAC SUFFIX CODES

CODE	COLOR
BL	Blue
GN	Green
GY	Gray
RD	Red
WH	White
YL	Yellow
MC	Multi-color (two each of blue, green, gray, red, and yellow)

Add these letter suffixes to the end of the seven-digit part numbers of the 10-32 and M4 threaded RheFlex Fittings on pages 11, 12, and 13.

RELATED PRODUCTS

- ▶ For PEEK tubing sleeves that can be used with these M4 RheFlex fittings, see page 20.
- ▶ For reusable fittings that both work in UHPLC applications and can help ensure the tubing is fully inserted into the receiving port, see the VHP-300 fitting shown earlier in this chapter on page 6.

Part No.	Description	Port	Pressure Rating	Head Style	Material	Qty.
RHEFLEX TWO-PIECE FITTINGS (INCLUDES FERRULES)						
6000-078	RheFlex Fitting for 1/8" OD Tubing	5/16-24 Coned	5,000 psi (345 bar)	5/16" Hex	PEEK, Natural	ea.
6000-254	RheFlex Fitting for 1/16" OD Tubing	10-32 Coned	7,000 psi (483 bar)	ChromTRAC knob	PEEK, Natural	10-pk
6000-255	RheFlex Fitting for 1/16" OD Tubing, Short	10-32 Coned	7,000 psi (483 bar)	1/4" Hex	PEEK, Natural	10-pk
REPLACEMENT FERRULES						
6000-079	RheFlex Ferrule for 1/8" OD Tubing	5/16-24 Coned	7,000 psi (483 bar)	ChromTRAC knob	PEEK, Natural	5-pk
6000-251	RheFlex Ferrule for 1/16" OD Tubing	10-32 Coned	7,000 psi (483 bar)	ChromTRAC knob	PEEK, Natural	10-pk